

30 Series

General Duty Dolly Casters

30 series casters are great on shop equipment and moving dollies. Featuring high capacity and low overall heights, relative to their size.


Capacity: up to 450 lbs

Wheel Sizes: 2", 2-1/2", 3", 4"

Top Plate Size: See Chart

Available Bearings: Plain (P)

Available Brakes: Cam Brake

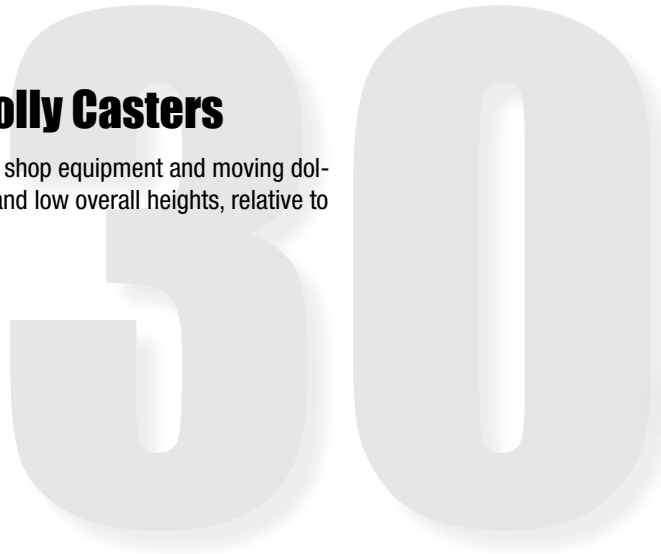

Top Plate Size & Bolt Hole Spacing

Wheel Size	Swivel Plate Size	Swivel Bolt Holes	Rigid Plate Size	Rigid Bolt Holes	Bolt Size
2"	1-7/8" x 2-9/16"	15/16" x 2-1/8"	1-1/2" x 2-21/32"	15/16" x 2-1/8"	1/4"
2-1/2"	2-3/4" x 3-13/16"	1-3/4" x 3"	2-1/4" x 4-7/16"	1-1/16" x 3-1/2"	5/16"
3"	3-1/8" x 4-1/8"	2-3/8" x 3-3/8"	2-1/2" x 4-15/16"	1-3/16" x 4"	5/16"
4"	4" x 5-1/8"	3" x 4"	3-1/8" x 6-1/4"	1-3/4" x 5"	3/8"

Hard Rubber



Swivel	Rigid	Swivel with Brake	Bearing	Dia	Overall Height	Cap
30HRP20S	30HRP20R	30HRP20S-CB	Plain	2"	2-1/2"	150 lbs
30HRP25S	30HRP25R	30HRP25S-CB	Plain	2-1/2"	3-3/16"	200 lbs
30HRP30S	30HRP30R	30HRP30S-CB	Plain	3"	3-13/16"	270 lbs
30HRP40S	30HRP40R	30HRP40S-CB	Plain	4"	5"	350 lbs

Polypropylene



Swivel	Rigid	Swivel with Brake	Bearing	Dia	Overall Height	Cap
30POP20S	30POP20R	30POP20S-CB	Plain	2"	2-1/2"	150 lbs
30POP25S	30POP25R	30POP25S-CB	Plain	2-1/2"	3-3/16"	200 lbs
30POP30S	30POP30R	30POP30S-CB	Plain	3"	3-13/16"	270 lbs
30POP40S	30POP40R	30POP40S-CB	Plain	4"	5"	350 lbs

Soft Rubber



Swivel	Rigid	Swivel with Brake	Bearing	Dia	Overall Height	Cap
30SRP20S	30SRP20R	30SRP20S-CB	Plain	2"	2-1/2"	90 lbs
30SRP25S	30SRP25R	30SRP25S-CB	Plain	2-1/2"	3-3/16"	100 lbs
30SRP30S	30SRP30R	30SRP30S-CB	Plain	3"	3-13/16"	175 lbs
30SRP40S	30SRP40R	30SRP40S-CB	Plain	4"	5"	225 lbs

Sintered Iron



Swivel	Rigid	Swivel with Brake	Bearing	Dia	Overall Height	Cap
30CIP20S	30CIP20R	30CIP20S-CB	Plain	2"	2-1/2"	150 lbs
30CIP25S	30CIP25R	30CIP25S-CB	Plain	2-1/2"	3-3/16"	200 lbs
30CIP30S	30CIP30R	30CIP30S-CB	Plain	3"	3-13/16"	300 lbs
30CIP40S	30CIP40R	30CIP40S-CB	Plain	4"	5"	450 lbs