

44 Series

Medium Duty Industrial Casters

44 Series casters provide medium duty capacity at a value price featuring cold forged steel construction and heat-treated swivel raceways.

Capacity: up to 1,250 lbs

Wheel Sizes: 3-1/4" to 8"

Top Plate Size: 4" x 4-1/2"

Bolt Hole Spacing: 2-5/8" x 3-5/8" slotted to 3" x 3", 3/8" bolt


Available Bearings: Roller (R), Ball (B), Delrin (D), Caged Roller (C)



Options

Option Code	Description	Notes
SL	Swivel Lock	Field Installable
CB	Cam Brake	Incompatible with Ball Bearings
TB	Tread Brake	
FB	Face Brake	
FBB	HD Face Brake	
TLB	Total Lock Brake	
GS	Grease Seals	Swivel Section
SS	Stainless Steel	Rigs and bearings
TG	Thread Guards	Available on 5", 6", or 8"
712	7-1/2" Overall Height	6" Models
43	43 Top Plate	Change 44 to 43 in part number Top Plate: 5" x 5-1/2" Bolt Holes: 4-1/8" x 4-1/2" Bolt Size: 3/8"

Top Plate Dimensions

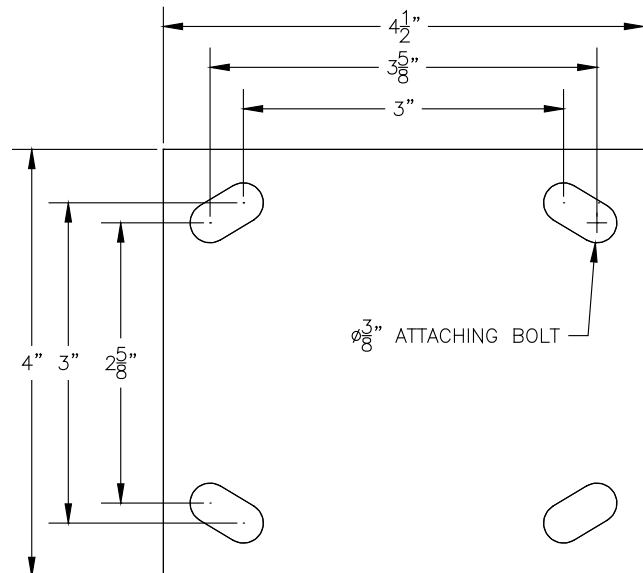

Thermoplastic Rubber



Swivel	Rigid	Bearing	Wheel Size	Overall Height	Cap
44TRR42S	44TRR42R	Roller	4" x 2"	5-5/8"	350 lbs
44TRR52S	44TRR52R	Roller	5" x 2"	6-1/2"	400 lbs
44TRR62S	44TRR62R	Roller	6" x 2"	7-1/4"	550 lbs
44TRR82S	44TRR82R	Roller	8" x 2"	9-1/2"	675 lbs

Mold on Rubber on Iron



Swivel	Rigid	Bearing	Wheel Size	Overall Height	Cap
44RIR42S	44RIR42R	Roller	4" x 2"	5-5/8"	350 lbs
44RIR52S	44RIR52R	Roller	5" x 2"	6-1/2"	400 lbs
44RIR62S	44RIR62R	Roller	6" x 2"	7-1/4"	410 lbs
44RIR82S	44RIR82R	Roller	8" x 2"	9-1/2"	500 lbs

44 Series

Polyurethane on Plastic



Swivel	Rigid	Bearing	Wheel Size	Overall Height	Cap
44PPR42S	44PPR42R	Roller	4" x 2"	5-5/8"	600 lbs
44PPR52S	44PPR52R	Roller	5" x 2"	6-1/2"	750 lbs
44PPR62S	44PPR62R	Roller	6" x 2"	7-1/4"	900 lbs
44PPR82S	44PPR82R	Roller	8" x 2"	9-1/2"	1,000 lbs

Also available with gray tread, note on order.

Polyurethane on Iron



Swivel	Rigid	Bearing	Wheel Size	Overall Height	Cap
44PIR42S	44PIR42R	Roller	4" x 2"	5-5/8"	700 lbs
44PIR52S	44PIR52R	Roller	5" x 2"	6-1/2"	1,000 lbs
44PIR62S	44PIR62R	Roller	6" x 2"	7-1/4"	1,200 lbs
44PIR82S	44PIR82R	Roller	8" x 2"	9-1/2"	1,200 lbs

Also available with blue tread, note on order.

Polyurethane on Aluminum



Swivel	Rigid	Bearing	Wheel Size	Overall Height	Cap
44PAR42S	44PAR42R	Roller	4" x 2"	5-5/8"	700 lbs
44PAR52S	44PAR52R	Roller	5" x 2"	6-1/2"	1,050 lbs
44PAR62S	44PAR62R	Roller	6" x 2"	7-1/4"	1,230 lbs
44PAR82S	44PAR82R	Roller	8" x 2"	9-1/2"	1,250 lbs

Solid Elastomer



Swivel	Rigid	Bearing	Wheel Size	Overall Height	Cap
44SEB42S	44SEB42R	Prec. Ball	4" x 2"	5-5/8"	1,050 lbs
44SEB52S	44SEB52R	Prec. Ball	5" x 2"	6-1/2"	1,200 lbs
44SEB62S	44SEB62R	Prec. Ball	6" x 2"	7-1/4"	1,250 lbs
44SEB82S	44SEB82R	Prec. Ball	8" x 2"	9-1/2"	1,250 lbs

HD Polyurethane on Plastic



Swivel	Rigid	Bearing	Wheel Size	Overall Height	Cap
44UPR42S	44UPR42R	Roller	4" x 2"	5-5/8"	600 lbs
44UPR52S	44UPR52R	Roller	5" x 2"	6-1/2"	900 lbs
44UPR62S	44UPR62R	Roller	6" x 2"	7-1/4"	1,100 lbs
44UPR82S	44UPR82R	Roller	8" x 2"	9-1/2"	1,200 lbs

Solid Polyurethane



Swivel	Rigid	Bearing	Wheel Size	Overall Height	Cap
44SUC42S	44SUC42R	Caged	4" x 2"	5-5/8"	700 lbs
44SUC52S	44SUC52R	Caged	5" x 2"	6-1/2"	1,000 lbs
44SUC62S	44SUC62R	Caged	6" x 2"	7-1/4"	1,200 lbs
44SUC82S	44SUC82R	Caged	8" x 2"	9-1/2"	1,250 lbs

Medium Duty

Phenolic



Swivel	Rigid	Bearing	Wheel Size	Overall Height	Cap
44PNR32S	44PNR32R	Roller	3-1/4" x 2"	4-1/4"	700 lbs
44PNR42S	44PNR42R	Roller	4" x 2"	5-5/8"	800 lbs
44PNR52S	44PNR52R	Roller	5" x 2"	6-1/2"	1,000 lbs
44PNR62S	44PNR62R	Roller	6" x 2"	7-1/4"	1,200 lbs
44PNR82S	44PNR82R	Roller	8" x 2"	9-1/2"	1,250 lbs

Polypropylene



Swivel	Rigid	Bearing	Wheel Size	Overall Height	Cap
44POR42S	44POR42R	Roller	4" x 2"	5-5/8"	450 lbs
44POR52S	44POR52R	Roller	5" x 2"	6-1/2"	550 lbs
44POR62S	44POR62R	Roller	6" x 2"	7-1/4"	650 lbs
44POR82S	44POR82R	Roller	8" x 2"	9-1/2"	800 lbs

Cast Iron



Swivel	Rigid	Bearing	Wheel Size	Overall Height	Cap
44CIR32S	44CIR32R	Roller	3-1/4" x 2"	4-1/4"	700 lbs
44CIR42S	44CIR42R	Roller	4" x 2"	5-5/8"	700 lbs
44CIR52S	44CIR52R	Roller	5" x 2"	6-1/2"	900 lbs
44CIR62S	44CIR62R	Roller	6" x 2"	7-1/4"	900 lbs
44CIR82S	44CIR82R	Roller	8" x 2"	9-1/2"	900 lbs

Reinforced Polypropylene



Swivel	Rigid	Bearing	Wheel Size	Overall Height	Cap
44GPR42S	44GPR42R	Roller	4" x 2"	5-5/8"	800 lbs
44GPR52S	44GPR52R	Roller	5" x 2"	6-1/2"	1,000 lbs
44GPR62S	44GPR62R	Roller	6" x 2"	7-1/4"	1,200 lbs
44GPR82S	44GPR82R	Roller	8" x 2"	9-1/2"	1,250 lbs

V-Groove Cast Iron



Swivel	Rigid	Bearing	Wheel Size	Overall Height	Cap
44VIR42S	44VIR42R	Roller	4" x 2"	5-5/8"	800 lbs
44VIR52S	44VIR52R	Roller	5" x 2"	6-1/2"	800 lbs
44VIR62S	44VIR62R	Roller	6" x 2"	7-1/4"	1,000 lbs

Forged Steel



Swivel	Rigid	Bearing	Wheel Size	Overall Height	Cap
44FSR41S	44FSR41R	Roller	4" x 1-1/2"	5-5/8"	1,250 lbs
44FSR52S	44FSR52R	Roller	5" x 2"	6-1/2"	1,250 lbs
44FSR62S	44FSR62R	Roller	6" x 2"	7-1/4"	1,250 lbs